


# STANDARD PRODUCT OVERVIEW

**BULLETIN:**  
**SPO-06.0**  
**EFFECTIVE: 3/2006**

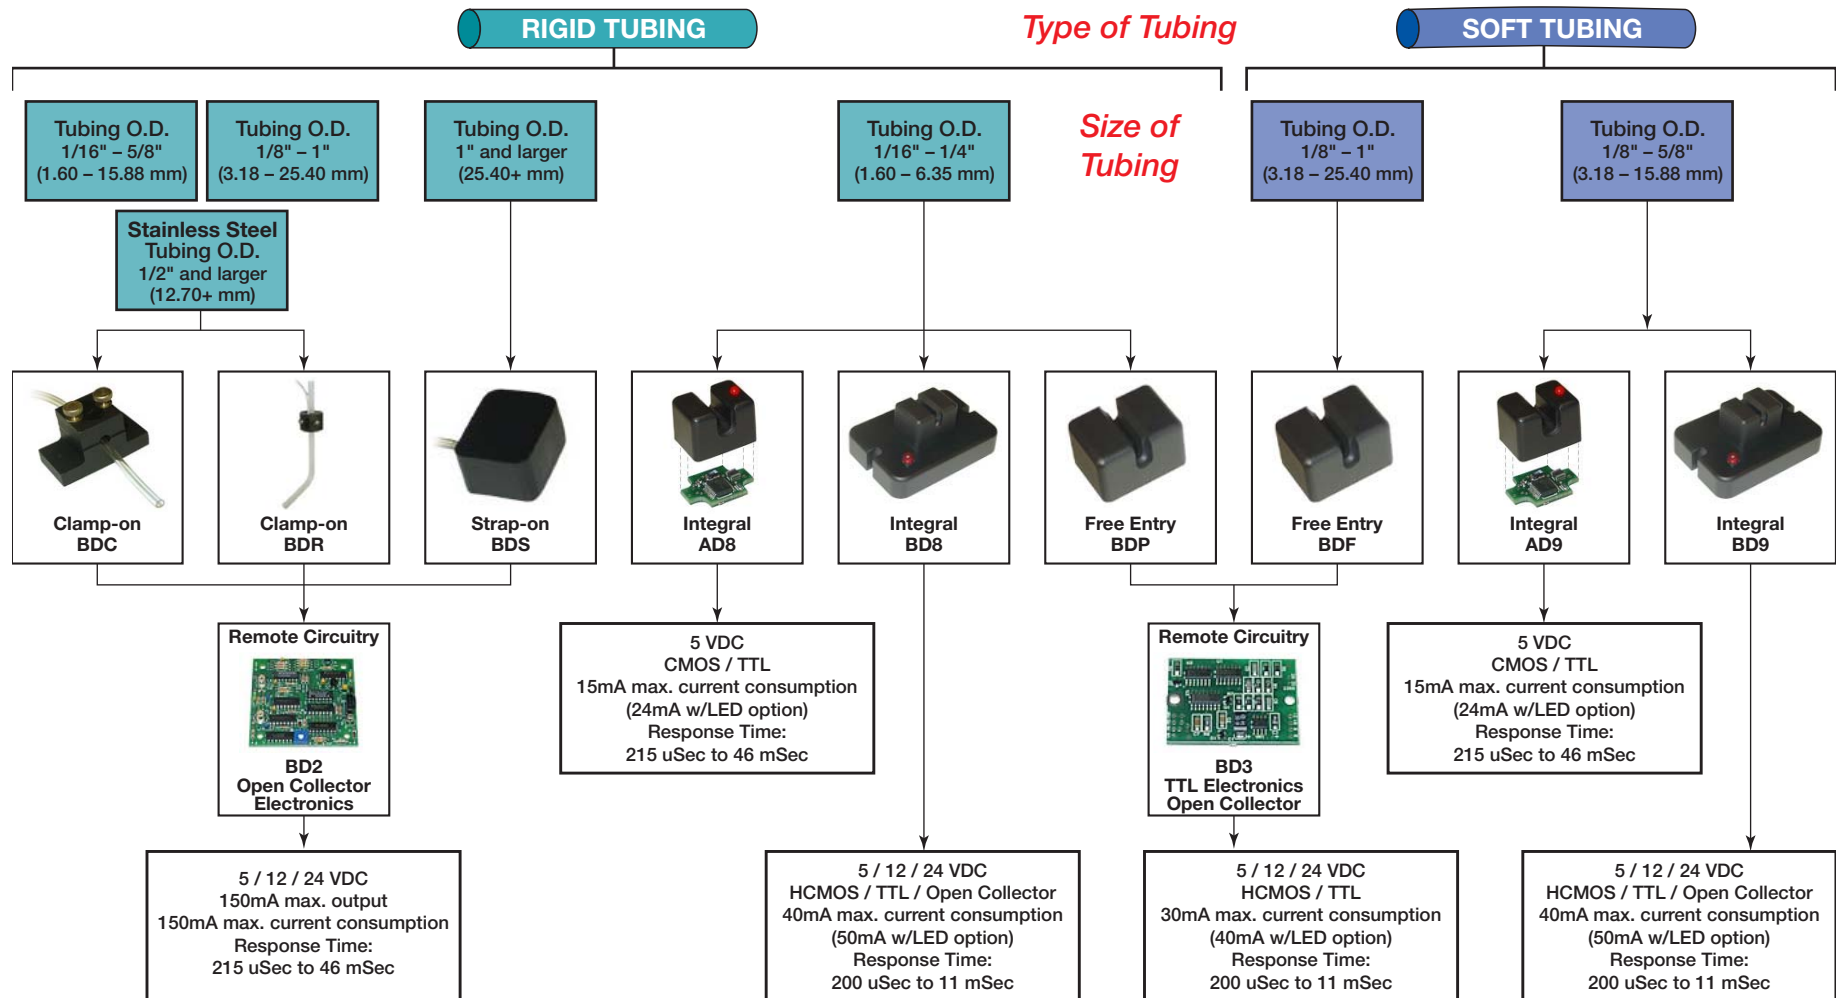

**Temperature Limits (standard):** +5° to +60° C (operating)/ -20° to 85° C (storage) / **Humidity:** 0 to 95%

**Calibration:** All sensors and electronics are factory calibrated, no field calibration is required.

**Self-test feature:** Holding the self-test wire at ground potential allows for normal operation. An open circuit of the self-test input will disable the internal transmitter, resulting in an output indication of air. An internal pull-up provides a fail-safe to the test condition in case of a broken test lead.

**Custom Sensor Design:** Any feature of the sensors and electronic circuitry illustrated can be custom designed to meet OEM form, fit, and functional requirements.

